




Panels

Panel Assembly Miniature Locking Horizontal

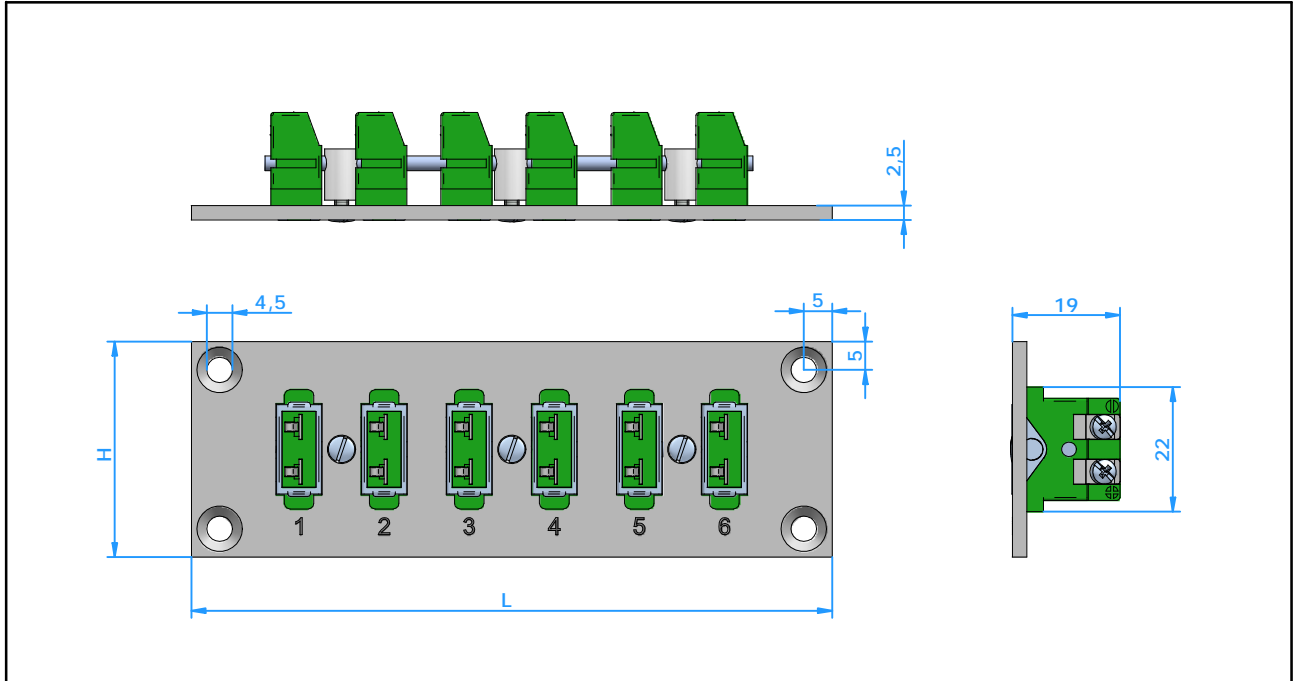

Application

Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc. When used together with CMLP the locking feature will prevent accidental disconnection due to vibration etc.

Wire size

- Accepts wires up to 2,0 mm.

Temperature rating

- 200 °C Maximum

Construction

This panel consists of the panel set 20.400-x fitted with the miniature panel inserts PMLI-... For further details see separate specification sheets.

Ordering Code PAML-x-yz

x =	number of circuits	1, 2, 3, 4, 5, 6, 8, 12, 18, 24
y =	calibration	E, J, K, N, T, U, R/S, C, B
z =	color code standard	I = IEC, A = ANSI, D = DIN, J = JIS

Circuits	Rows	Panel dimension (L x H in mm)	Dimension panel cut-out (in mm)
1	1	38 x 38	23 Ø
2	1	53 x 38	30 x 22
3	1	76 x 38	53 x 22
4	1	83 x 38	60 x 22
5	1	98 x 38	75 x 22
6	1	113 x 38	90 x 22
8	1	143 x 38	120 x 22
12	1	203 x 38	180 x 22
18	1	293 x 38	270 x 22
24	2	203 x 76	180 x 60