


Accessories

Standard Connectors

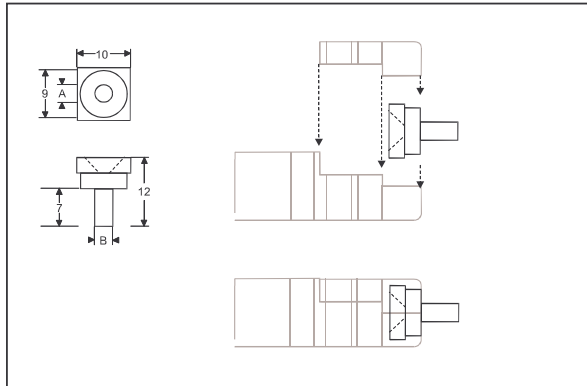


Crimp Insert

Application: Designed for soldering or crimping on mineral insulated cable or crimping on insulated wire.

Construction: Brass machined insert with 0,1 mm tolerance on the cable OD.

Part No.:	Dim A	Dim B
A-20.025-1	1,1	2,4
A-20.025-2	1,6	2,4
A-20.025-3	1,7	2,4
A-20.025-4	2,1	3,2
A-20.025-5	2,4	3,2
A-20.025-6	3,1	4,3
A-20.025-7	3,3	4,3
A-20.025-8	4,6	6,0
A-20.025-9	4,9	6,0
A-20.025-10	6,1	7,9
A-20.025-11	6,5	7,9
A-20.025-12	Blind	7,9
A-20.025-13	5,6	6,5
A-20.025-14	7,0	7,9
A-20.260-1	9,0	10,0

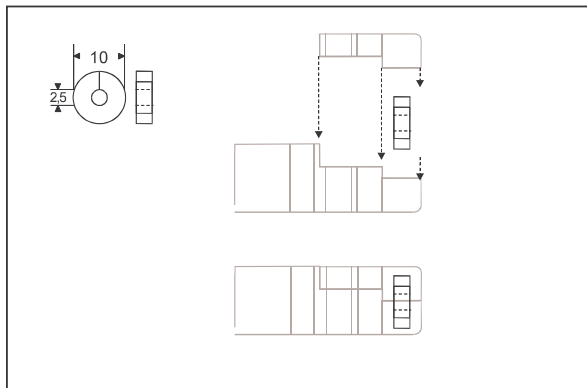

Grommet

Application: Fitted in the entrance hole of the connector to prevent moisture and dirt from entering the connector. Has limited strain relief capabilities.


Construction:

- Neoprene ring slit for easy mounting over the wire. Will compress on the wire when cover is fitted.

Temperature Rating:

- 120 Deg. C Max.

Part No.: A-20.048-1

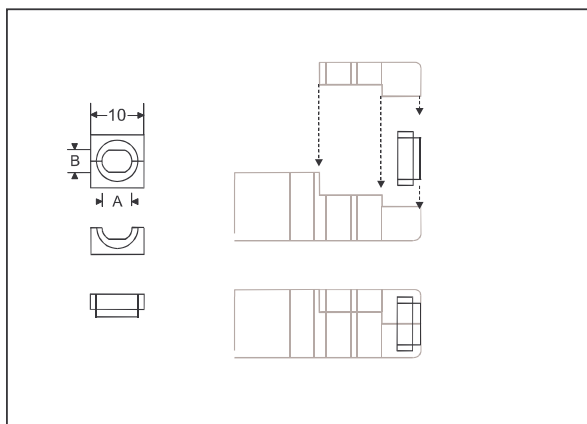

Wire Insert

Application: Wire inserts will provide a good strain relief without protruding parts from the connector.

Construction:

- Thermoplastic material with round or oval hole to fit around a specific wire. Other dimensions available on request.

Part No.:	Round/Oval	DimA	Dim B
A-20.076-5	R	3,5	
A-20.076-24	R	2,0	1,5

01-08-07