


# Connectors

## Standard Multiple Jack

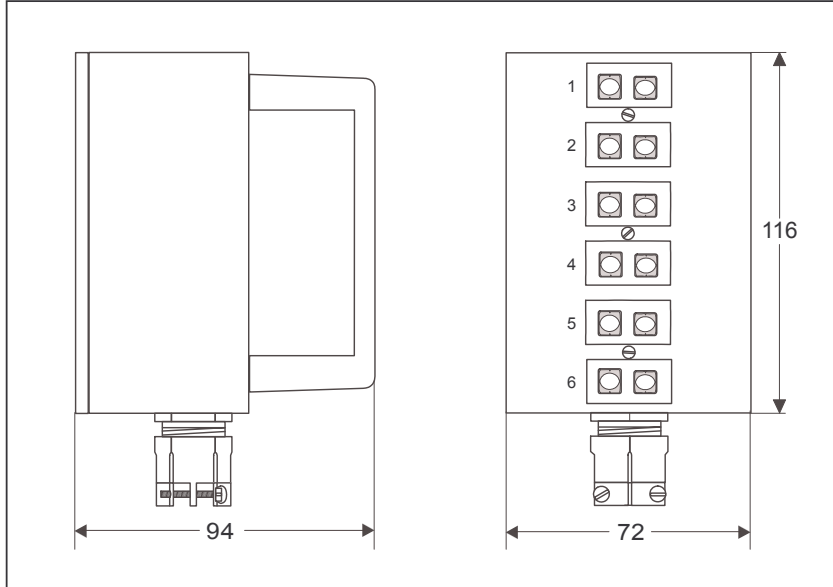

### Application:

Multiple jack for thermocouple and RTD circuits. Suitable for connecting up to 6 standard circuits simultaneously.

### Construction:

- Rugged steel epoxy painted housing.
- Anodized aluminium handle for easy grip.
- Available in 1 thru 6 circuits version.
- Incorporates a Hamitherm standard vertical panel model Nr PAV-..

### Wire size:

- Accepts wires from 0,2 mm to 2,0 mm.
- Entrance fitting PG 13 will allow cable diameters up to 15 mm.

### Temperature rating:

- 200 Deg. C Max.
- 

### Color Code:

- Calibration is indicated by color coding of panel inserts.
- Available in all color code standards.

Calibration Code	J	K	T	E	R/S	U	N
Contact Material Positive	Fe	NiCr	Cu	NiCr	Cu	Cu	NiCrSi
Contact Material Negative	CuNi	NiAl	CuNi	CuNi	Alloy #11	Cu	NiSi
<b>ANSI Color Code</b>							
Color Dot	Black	Yellow	Blue	Violet	Green	White	Orange
	Part Nr.						
1 Circuit	MJS-1-JA	MJS-1-KA	MJS-1-TA	MJS-1-EA	MJS-1-RA	MJS-1-UA	MJS-1-NA
2 Circuits	MJS-2-JA	MJS-2-KA	MJS-2-TA	MJS-2-EA	MJS-2-RA	MJS-2-UA	MJS-2-NA
3 Circuits	MJS-3-JA	MJS-3-KA	MJS-3-TA	MJS-3-EA	MJS-3-RA	MJS-3-UA	MJS-3-NA
4 Circuits	MJS-4-JA	MJS-4-KA	MJS-4-TA	MJS-4-EA	MJS-4-RA	MJS-4-UA	MJS-4-NA
5 Circuits	MJS-5-JA	MJS-5-KA	MJS-5-TA	MJS-5-EA	MJS-5-RA	MJS-5-UA	MJS-5-NA
6 Circuits	MJS-6-JA	MJS-6-KA	MJS-6-TA	MJS-6-EA	MJS-6-RA	MJS-6-UA	MJS-6-NA

Note: For IEC and DIN color code replace the last letter "A" with resp. "I" or "D".

01-08-07

Hamitherm BV – PO Box 433 – 2100 AK Heemstede – The Netherlands.

Tel. +31 (0)23 547 1283 – Fax +31 (0)23 547 8036 – info@hamitherm.nl - www.hamitherm.nl