


Connectors

Standard Multiple Plug

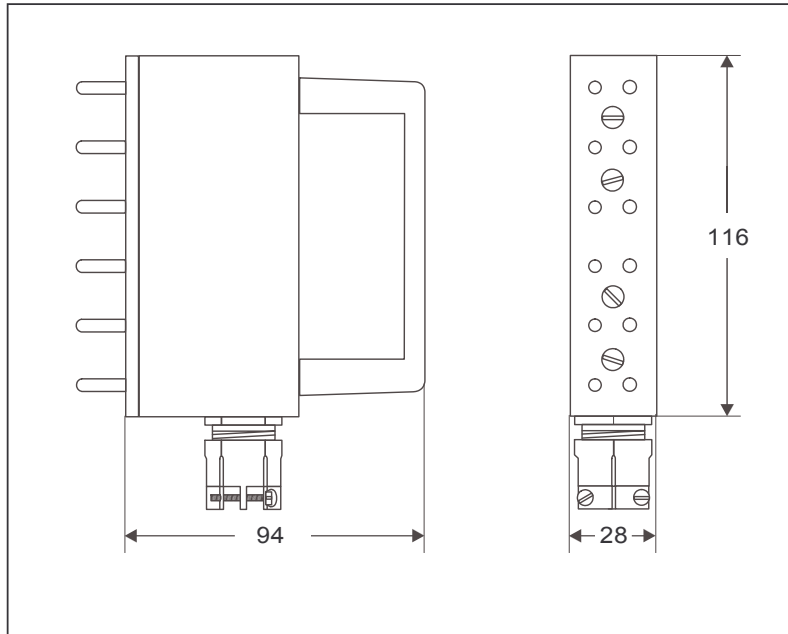

Application:

Multiple plug for thermocouple and RTD circuits. Suitable for connecting up to 6 standard circuits simultaneously.

Construction:

- Rugged steel epoxy painted housing.
- Anodized aluminium handle for easy grip.
- Available in 1 thru 6 circuits version.
- Corresponds with Hamitherm standard vertical panel model Nr PAV-.. and standard multiple jack model Nr MPJ-.-..

Wire size:

- Accepts wires from 0,2 mm to 1,5 mm.
- Entrance fitting PG 13 will allow cable diameters up to 15 mm.

Temperature rating:

- 200 Deg. C Max.

Color Code:

- Calibration is indicated by color coded dot on front.
- Available in all color code standards.

Calibration Code	J	K	T	E	R/S	U	N
Contact Material Positive	Fe	NiCr	Cu	NiCr	Cu	Cu	NiCrSi
Contact Material Negative	CuNi	NiAl	CuNi	CuNi	Alloy #11	Cu	NiSi
ANSI Color Code							
Color Dot	Black	Yellow	Blue	Violet	Green	White	Orange
	Part Nr.						
1 Circuit	MPS-1-JA	MPS-1-KA	MPS-1-TA	MPS-1-EA	MPS-1-RA	MPS-1-UA	MPS-1-NA
2 Circuits	MPS-2-JA	MPS-2-KA	MPS-2-TA	MPS-2-EA	MPS-2-RA	MPS-2-UA	MPS-2-NA
3 Circuits	MPS-3-JA	MPS-3-KA	MPS-3-TA	MPS-3-EA	MPS-3-RA	MPS-3-UA	MPS-3-NA
4 Circuits	MPS-4-JA	MPS-4-KA	MPS-4-TA	MPS-4-EA	MPS-4-RA	MPS-4-UA	MPS-4-NA
5 Circuits	MPS-5-JA	MPS-5-KA	MPS-5-TA	MPS-5-EA	MPS-5-RA	MPS-5-UA	MPS-5-NA
6 Circuits	MPS-6-JA	MPS-6-KA	MPS-6-TA	MPS-6-EA	MPS-6-RA	MPS-6-UA	MPS-6-NA

Note: For IEC and DIN color code replace the last letter "A" with resp. "T" or "D".
01-08-07

Hamitherm BV – PO Box 433 – 2100 AK Heemstede – The Netherlands.
Tel. +31 (0)23 547 1283 – Fax +31 (0)23 547 8036 – info@hamitherm.nl - www.hamitherm.nl