


Panels

Standard Panel Horizontal

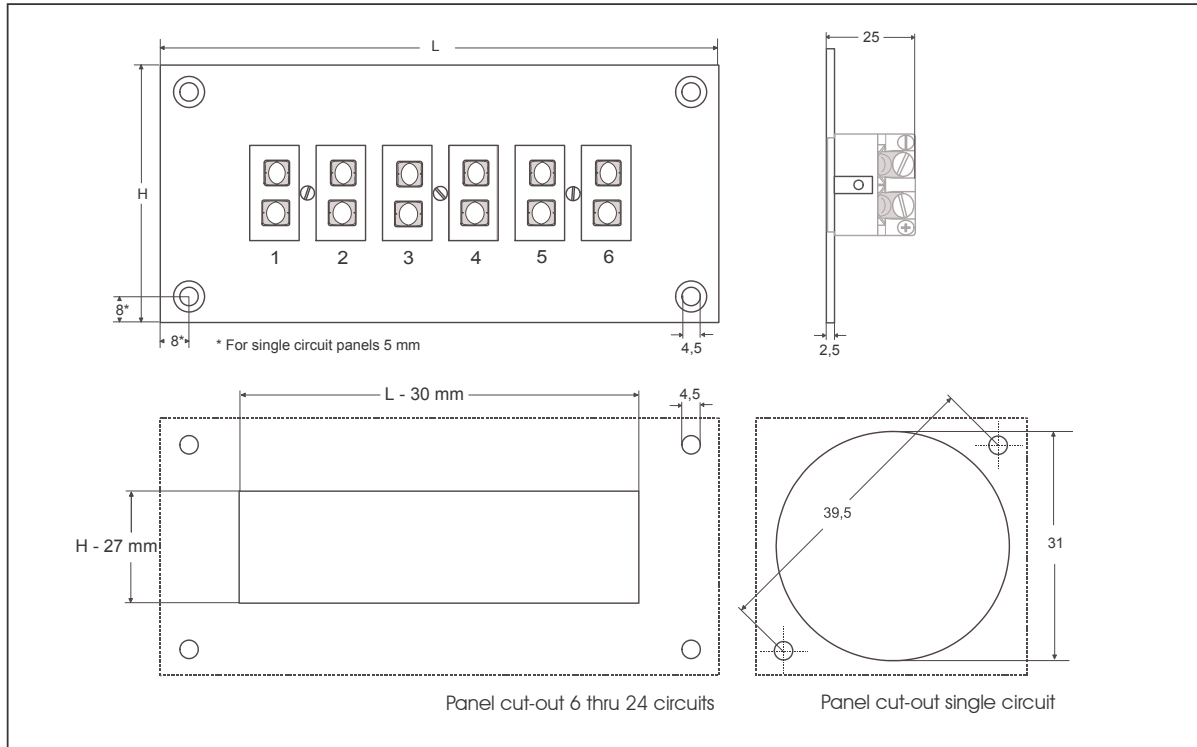

Application: Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

Wire size:

- Accepts wires from 0,2 mm to 2,0 mm.

Construction: This panel consists of the panel set BM-20.059-x fitted with the standard panel inserts PSI-... For further details see separate specification sheets.

Temperature rating:

- 200 Deg. C Max.

Ordering Code PAS-xx For last two digits 'xx' see table below

Calibration Code	E	J	K	N	T	U	R/S	C	B		
Compensation material for							Pt13Rh/ Pt	W5Re/ W26Re	Pt6Rh/ Pt30Rh		
Contact Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Cu	CPX	Cu		
Contact Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Alloy #11	CNX	Cu		
IEC Color Code											
Color Insert Body	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey		
Circuits	Rows	Dimensions L x H									
1	1	38 x 38	1-EI	1-JI	1-KI	1-NI	1-TI	1-UI	1-RI	1-C	1-BI
6	1	146 x 67	6-EI	6-JI	6-KI	6-NI	6-TI	6-UI	6-RI	6-C	6-BI
8	1	184 x 67	8-EI	8-JI	8-KI	8-NI	8-TI	8-UI	8-RI	8-C	8-BI
12	1	260 x 67	12-EI	12-JI	12-KI	12-NI	12-TI	12-UI	12-RI	12-C	12-BI
24	2	260 x 115	24-EI	24-JI	24-KI	24-NI	24-TI	24-UI	24-RI	24-C	24-BI

Note: For ANSI or DIN Color code replace last letter "I" with resp. "A" or "D".
01-08-07

Hamitherm BV – PO Box 433 – 2100 AK Heemstede – The Netherlands.
Tel. +31 (0)23 547 1283 – Fax +31 (0)23 547 8036 – info@hamitherm.nl - www.hamitherm.nl