


Panels

Standard Three Pin Panel Vertical High Temperature

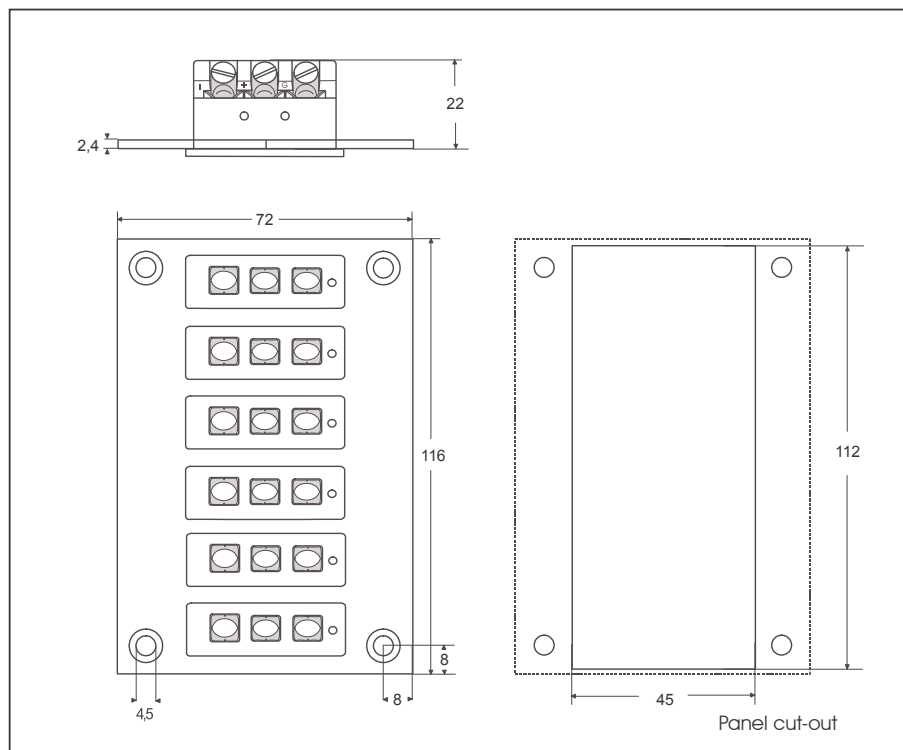

Application: Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

Construction:

- Stainless Steel front panel for full corrosion protection.
- Stainless steel bar to fix the panel inserts.
- Mounting construction will make it impossible to dislodge insert from panel.
- Angled screws on the insert will allow wiring of the panel after mounting. This prevents the necessity of removing the complete panel or one insert in order to change the wiring on one insert.

Wire size:

- Accepts wires from 0,2 mm to 2,0 mm.

Temperature rating:

- 350 Deg. C Max.

Ordering Code PASVHT-xx For last two digits 'xx' see table below

Calibration Code	E	J	K	N	T	U	R/S	C	B
Compensation material for							Pt13Rh/ Pt	W5Re/ W26Re	Pt6Rh/ Pt30Rh
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Cu	CPX	Cu
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Alloy #11	CNX	Cu
IEC Color Code									
Color Dot	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey
Code	EI	JI	KI	NI	TI	UI	RI	C	BI
ANSI Color Code									
Color Dot	Violet	Black	Yellow	Orange	Blue	White	Green	Red	Grey
Code	EI	JI	KA	NA	TA	UI	RA	C	BI
DIN Color Code									
Color Dot		Blue	Green		Brown		White		Grey
Code		JD	KI		TI		RD		BI

01-08-07

Hamitherm BV – PO Box 433 – 2100 AK Heemstede – The Netherlands.
Tel. +31 (0)23 547 1283 – Fax +31 (0)23 547 8036 – info@hamitherm.nl - www.hamitherm.nl