




# Panels

## Panel Standard Insert High Temperature

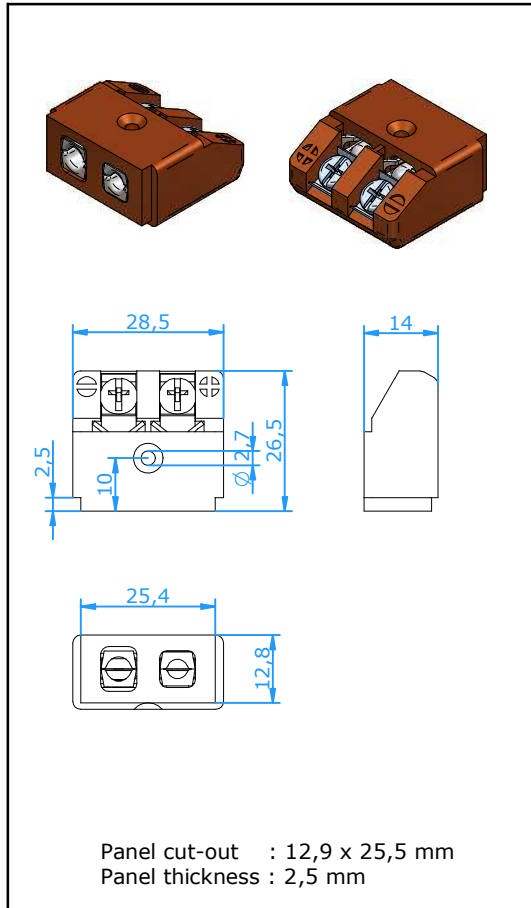

### Application

Panel insert for thermocouple and RTD circuits.

Specially designed to be used together with **Hamitherm** panel sets.

### Construction

- Thermoset body with original thermocouple material pins and springloaded inserts.
- Polarized pins.
- Molded barriers prevent short circuit.
- Polarity indication next to connection screws.

### Wire size

- Accepts wires up to 1,6 mm.

### Temperature rating

- 350 °C Max.

### Color Code

- Body color brown. Calibration indication printed on body

### Accessories

- Should be used with **Hamitherm** panel sets. Please see separate specification sheet.

**Ordering Code :**      **PSIH-x**      x' is Calibration Code (see tabel below)

Calibration Code Compensation material for	<b>E</b>	<b>J</b>	<b>K</b>	<b>N</b>	<b>T</b>	<b>U</b>	<b>R/S</b> Pt13Rh/ Pt	<b>C</b> W5Re/ W26Re	<b>B</b> Pt6Rh/ Pt30Rh
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu <sup>1)</sup>	Cu	CPX	Cu <sup>1)</sup>
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu <sup>1)</sup>	Alloy #11	CNX	Cu <sup>1)</sup>