# Panels

## Panel Assembly Standard Three Pin Vertical

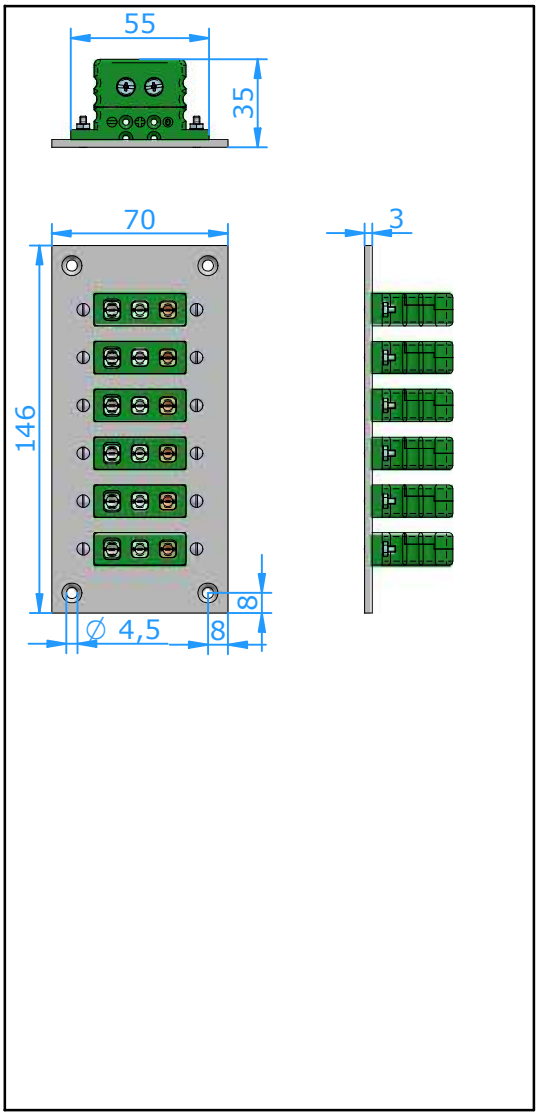


**Application**

Panel assembly for thermocouple and RTD circuits for mounting in control rooms, test stands, laboratory applications, pilot plants, etc.

**Construction**

This panel consists of the panel set 20.425 fitted with six standard panel inserts PSITL-... For further details see separate specification sheets.

**Wire size**

- Accepts wires up to 1,6 mm.

**Temperature rating**

- 200 °C Maximum

**Ordering Code** **PASVT-6-yz**

| | | |
|---|---|---|
| y = | calibration | E, J, K, N, T, U, R/S, C, B |
| z = | color code standard | I = IEC, A = ANSI, D = DIN, J = JIS |

`

| Circuits | Rows | Panel dimension (L x H in mm) | Dimension panel cut-out (in mm) |
|---|---|---|---|
| 6 | 1 | 70 x 146 | 110 x 60 |